

CAT5 Dongle-DVI

User Manual




www.kinankvm.com

@all right reserved Shenzhen Kinan Technology Co., Ltd


Printing date: 2022/05

Version: V1.0

Product Overview

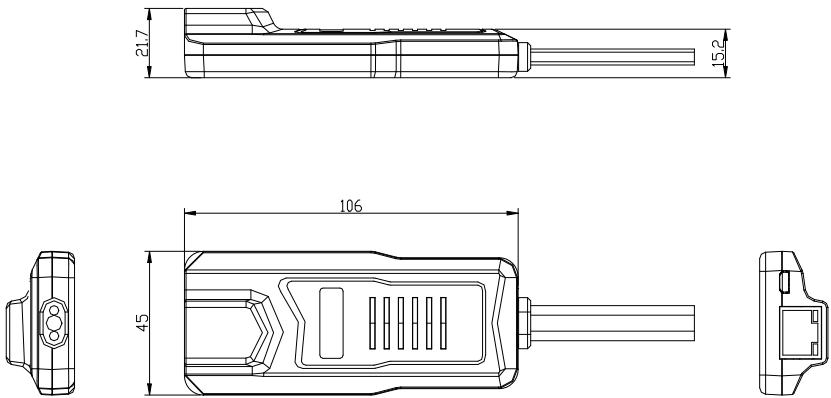

Connection Diagram

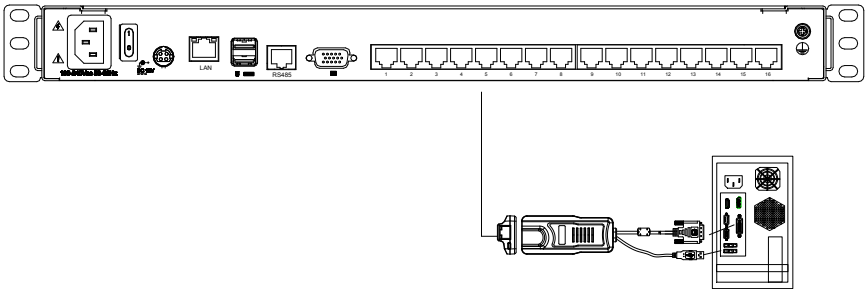

Explanation:

1. The cable used to connect the dongle must be a Category 5e (shielded) CAT5/6 network cable

2. RJ45-LED light on the dongle:

Green light is always on: Indicates that the PC or server that is connected to this dongle has been connected to the KVM and is powered on.

Orange and green lights are always on: Indicates that the PC or server that is connected to this dongle is in use.

Specifications

Model			KCM-2200D
Connector	Input	USB	1x USB type A
		DVI	1x DVI-D (24+1) (male)
	Output		1x RJ-45 (Female)
LED	Connected		Steady green light
	Online		Steady orange and green lights
Environment Requirements	Operating Temperature		0-50°C
	Store Temperature		-20-60°C
	Humidity		0-80%RH, Non-condensing
Physical Features	Material		Plastic
	Cable Length		DVI: 150 mm (Including DVI connector) USB: 300 mm
	Weight		110g
	Dimension		106 mmx45 mmx21.7mm